

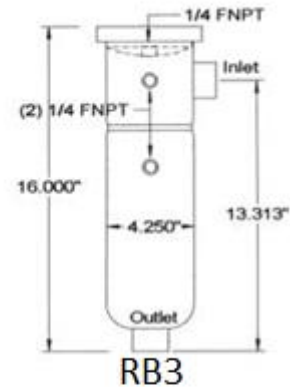
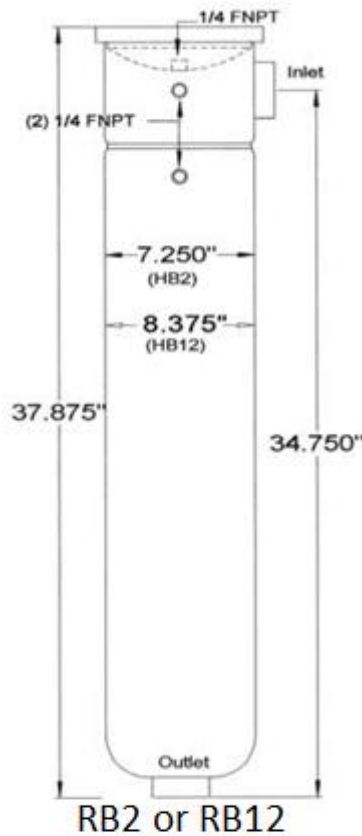


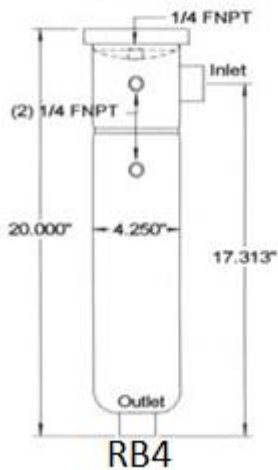

Riley Equipment Company
6911 Gant Road
Houston, Texas 77066
sales@recofiltration.com
(281) 583-5295 Fax: (281) 583-5299

Bag Filter Housings

RECO's Bag Filter Housings offer a quick open clamp design, a lid vent, drain port, gauge ports, and adjustable legs. Our Bag Filter Housings can accommodate #1, #2, #3, #4, and #12 Site Filter Bags. It can also connect with NPT Female ports that protect threads during shipping or 150# ANSI flanges. The support baskets are stainless steel with 9/64 perforations. It has an epoxy power coating for durability, and can accept different mesh lined baskets for your individual application needs. Housings are rated at 150 PSI inlet pressure at 200°F and are supplied with Buna-N seals.

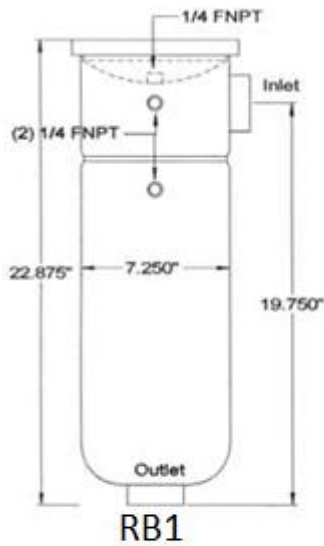

Building a Part Number					
Bag Size	Basket Size	Pipe Size (inches)	Type	Material	Style of Outlet
HB3	6	1.5	A	C	B
RB3	6	1, 1.5, 2	A = NPT	C = Carbon	S = Side
RB4	12	1, 1.5, 2	B = Flange	4 = 304 SS	B = Bottom
RB1	15	2, 3, 4		6 = 316 SS	
RB2	30	2, 3, 4			
RB12	30	2, 3, 4			

Max Flow Rate	Housing Size	Basket Size (inches)
50 gpm	RB3	6
50 gpm	RB4	12
100 gpm	RB1	15
200 gpm	RB2	30
225 gpm	RB12	30