




Riley Equipment Company
 6911 Gant Road
 Houston, Texas 77066
 sales@recofiltration.com
 (281) 583-5295 Fax: (281) 583-5299

Cartridge Filter Housings

RECO's Cartridge Filter Housings offer a quick open clamp design, lid vent, drain ports, gauge ports, and adjustable legs. Connection choices for the Cartridge filter housings are NPT female ports that protect threads, or 150# ANSI flanges. Housings have fully welded universal base cups that accept DOE and 222, as well as a universal top seal place for cup/spring or fin style tops. We use epoxy powder coating for durability, and a Buna-N seal.

- Available in Carbon, 304 SS, 316 SS
- 2-500 GPM
- Heights: 10, 20, 30, 40 inches
- Rated at 150 PSI inlet pressure at 200°F

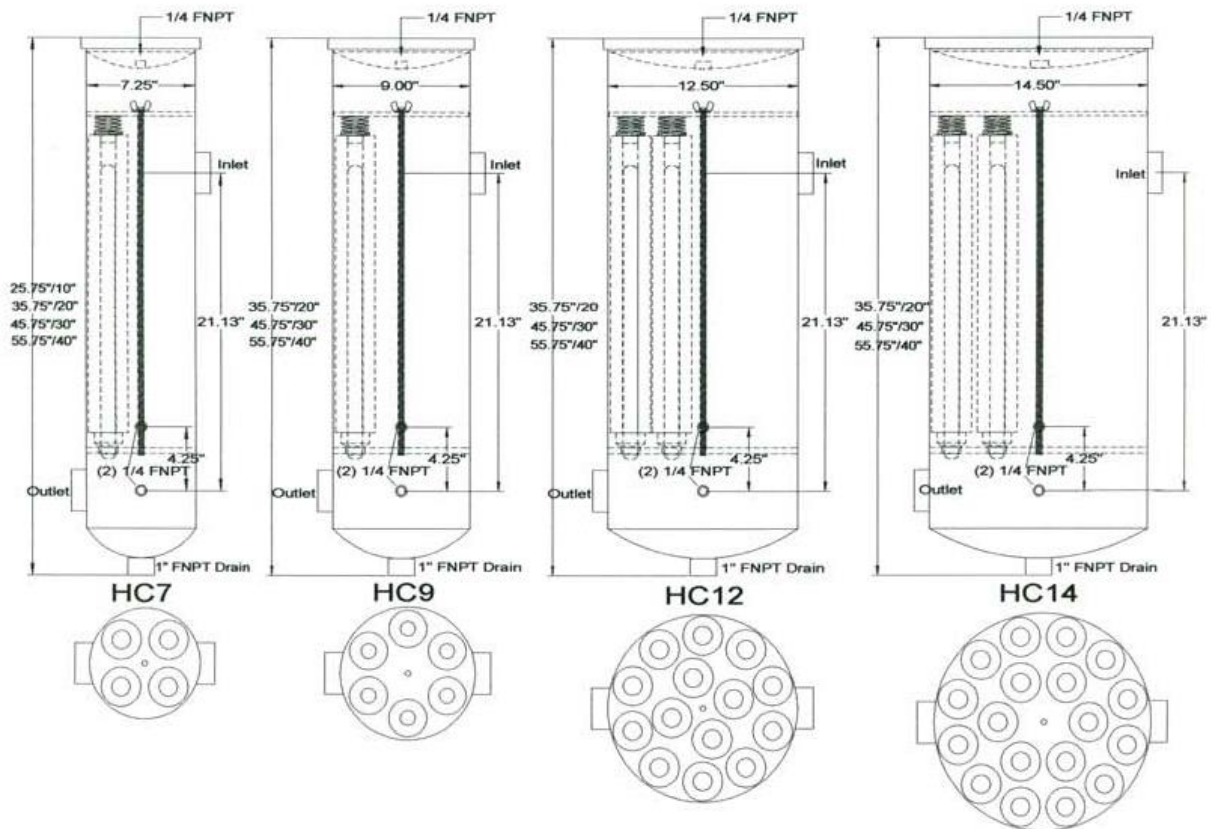

Building a Part Number					
Model, Housing Size	Elements Per Housing	Element Height (inches)	Connection (inches)	Type	Material
HC9	6	30	2	A	C
HC7 HC9 HC12 HC14	4 6 14 18	10, 20, 30, 40 20, 30, 40 20, 30, 40 30, 40	1, 1.5, 2 2, 3, 4 2, 3, 4 2, 3, 4	A = NPT B = Flange	C = Carbon 4 = 304 SS 6 = 316 SS